




TL-B04, TL-B05 PERFORMANCE

same performance different pump head

Model	Product Code	Max Flow Rate (L/M)	Rated Voltage (DC)	Current (A)	Max Water Head (M)	Power (W)
TL-B04	TL-B04-12-0804	8L	12VDC	0.68	4	8
	TL-B04-12-1006	10L	12VDC	1.2	6	14.5
	TL-B04-24-0804	8L	24VDC	0.68	4	16
	TL-B04-24-1006	10L	24VDC	0.8	6	19.5
	TL-B04-24-1208	12L	24VDC	0.98	8	24
pump itself meet: 70℃ normal circulation						
can be customized: /S /PV /5V /FG (submersible / solar panel driven / 0~5V speed control / speed signal wire)						

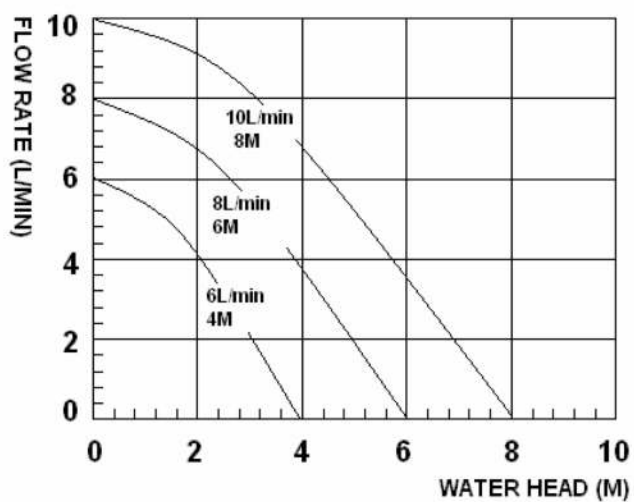