

# C2

## Micro DC Brushless Pump

### Typical Applications

- Water Heater
- Intelligent Toilet
- Boosting System
- Water Circulation
- Drinking Industry




### Specification

Model	Product Code	Max Flow Rate (L/Min)	Max Water Head (M)	Voltage (VDC)	Current (A)	Power (W)
C2	C2-A12-2704	27	4	12	1.8	21.6
	C2-A12-3408	34	8	12	4.5	54
	C2-A24-3206	32	6	24	1.45	34.8
	C2-A24-3709	37	8.5	24	2.5	60

Customization: 1. /H High temperature 100 °C (212°F) 2. /S Submersible, liquid ≤50°C 3. /FG (RPM) signal wire  
4. /PV Powered by solar panel directly 5. /PWM or /5V speed control

### Curve & Dimension

C2 Performance

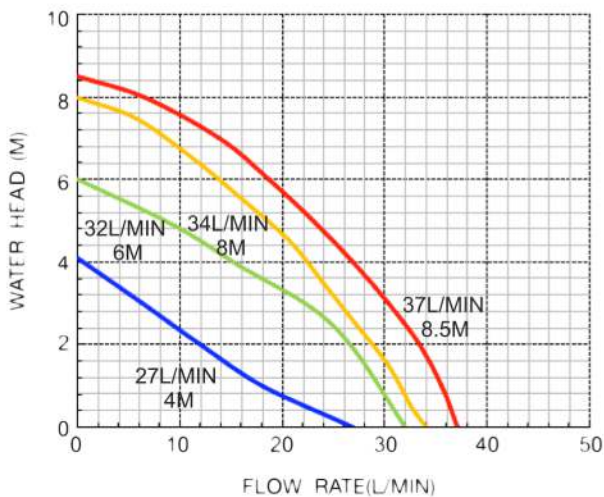

Dimension (mm)

